

# Actuator

14-  
556.02502

Distribution by  
DigiKey

**DigiKey**

<https://digikey.eao.com/p/14-556.02502>

Your product:

---



## 14-556.02502

### Actuator

#### FRONT

|                              |           |
|------------------------------|-----------|
| <b>Front bezel colour:</b>   | Nature    |
| <b>Front bezel material:</b> | Aluminium |

#### OPERATING-/INDICATION PART

|                        |         |
|------------------------|---------|
| <b>Lever colour:</b>   | Black   |
| <b>Lever shape:</b>    | long    |
| <b>Lever material:</b> | plastic |

#### ELECTRICAL CHARACTERISTICS

|   |   |
|---|---|
| <b>Standards:</b>                               | According to EN/IEC 61058-1   |
| <b>Electric strength:</b>                       | 3000 VAC, 50 Hz, 1 min. between all terminals and earth, according to EN/IEC 61058-1  |
| <b>Rated Operational Voltage U<sub>e</sub>:</b> | 250 VAC/DC according to EN IEC 61058-1  |
| <b>Contacts:</b>                                | 1 NC / 1 NO   |
| <b>Protection class:</b>                        | II  |
| <b>Electrical lifetime:</b>                     | 50 000 cycles of operation  |
| <b>Thermal current I<sub>th</sub>:</b>          | 5 A, according to EN / IEC 60947-5-1<br>The maximum current in continuous operation and at ambient temperature not exceeding the quoted maximum values.   |
| <b>Switching voltage and switching current:</b> | 250 VAC, 5 A (ohmic)<br>250 VAC, 2 A (inductive, $\cos(\phi) = 0.7$ )<br>220 VDC, 0.1 A (inductive, L:R = 30 ms)<br>110 VDC, 0.2 A (inductive, L:R = 30 ms)<br>60 VDC, 0.7 A (inductive, L:R = 30 ms)<br>24 VDC, 2 A (inductive, L:R = 30 ms) |

#### MECHANICAL CHARACTERISTIC

|                             |  |
|-----------------------------|--|
| <b>Weight:</b>              | 0.024 kg   |
| <b>Contact material:</b>    | Gold   |
| <b>Switching system:</b>    | Snap-action switching element  |
| <b>Tightening torque:</b>   | Fixing nut max. 0.25 Nm  |
| <b>Switching action:</b>    | Rest - Maintained  |
| <b>Switching system:</b>    | Self-cleaning, double-break snap action switching system, 1 normally closed and 1 normally open contact per element. |
| <b>Operating Travel:</b>    | ca. 90°  |
| <b>Operating force:</b>     | 3 N ... 6 N, depending on the number of switching elements   |
| <b>Terminal:</b>            | Soldering terminal   |
| <b>Switching positions:</b> | 2 positions  |
| <b>Switching angle:</b>     | 90° right  |
| <b>Mechanical lifetime:</b> | 1 Mio. cycles of operation   |

## AMBIENT CONDITION

|                               |   |
|-------------------------------|---|
| <b>Shock resistance:</b>      | Max. 150 m / s <sup>2</sup> , pulse width 11 ms, 3-axis, (semi-sinusoidal as per EN IEC 60068-2-27) |
| <b>Storage temperature:</b>   | – 40 °C ... + 85 °C   |
| <b>Vibration resistance:</b>  | Max. 100 m / s <sup>2</sup> from 10 Hz ... 500 Hz, (sinusoidal EN IEC 60068-2-6)                    |
| <b>Climate resistance:</b>    | Standard condition, as per DIN EN 60068-2-78<br>Standard cyclic, as per DIN IEC 60068-2-30          |
| <b>Operating temperature:</b> | – 25 °C ... + 55 °C, mounted as a block, make sure the heat can escape freely                       |
| <b>IP front protection:</b>   | IP67, according to DIN EN 60529   |


## CERTIFICATE

|                      |  |
|----------------------|--|
| <b>Conformities:</b> | CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)  |
| <b>Approbations:</b> | CB (IEC 61058-1), CQC, CSA, DNV, ENEC (EN 61058-1), UL |


## OTHER

|   |   |
|---|---|
| <b>Short Description:</b>                 | Actuator, non illuminative, Black, long, Nature, Aluminium, anodised, 1 NC / 1 NO, Rest - Maintained, Soldering terminal, IP67, according to DIN EN 60529 |
| <b>Hints:</b>                             | The colour of anodised aluminium parts can vary due to technical production reasons   |
| <b>max. number of switching elements:</b> | 1   |


### Switching positions:

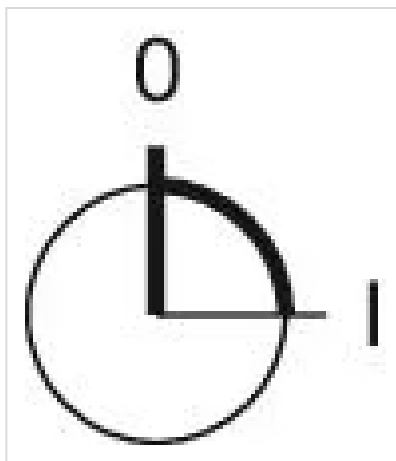

### Mounting cut-outs:

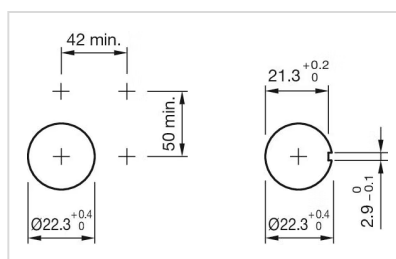

### Dimension drawings:

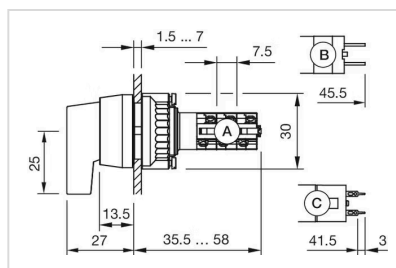

### Wiring diagrams:

