

# Actuator

17-000350

Distribution by  
DigiKey

**DigiKey**



<https://digikey.eao.com/p/17-000350>

Your product:

---



## 17-000350 Actuator

### FRONT

<b>Front dimension:</b>	Ø 7 mm
<b>Reflector:</b>	Metal, polished chromium-plated, flat top LED
<b>Front form:</b>	round

### MOUNTING

<b>Mounting cut-out:</b>	Ø 6 mm
<b>Design:</b>	raised

### OPERATING-/INDICATION PART

<b>Illumination colour:</b>	Red
-----------------------------	-----

### ELECTRICAL CHARACTERISTICS

<b>Lumi. Intensity:</b>	8 mcd
<b>Operation current:</b>	15 mA ±15 %
<b>Operating voltage:</b>	24 V AC/DC ±10 %
<b>Polarity:</b>	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector

### MECHANICAL CHARACTERISTIC

<b>Tightening torque:</b>	Fixing nut max. 0.2 Nm
<b>Weight:</b>	0.003 kg
<b>Terminal:</b>	Plug-in terminal, 2 x 0.5 mm

## AMBIENT CONDITION

**Storage temperature:** - 25 °C ... + 80 °C

**Operating temperature:** - 20 °C ... + 60 °C

**IP Protection:** IP40 front side, IP65 front side, according to IEC 60529

## CERTIFICATE

**Conformities:** 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)

**Approbations:** UL


## OTHER

**Hints:** Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.


**Kind of illumination:** Single-LED

**Short Description:** Actuator, Ø 6 mm, Ø 7 mm, round, Plug-in terminal, 2 x 0.5 mm, Red

**Mounting cut-outs:**

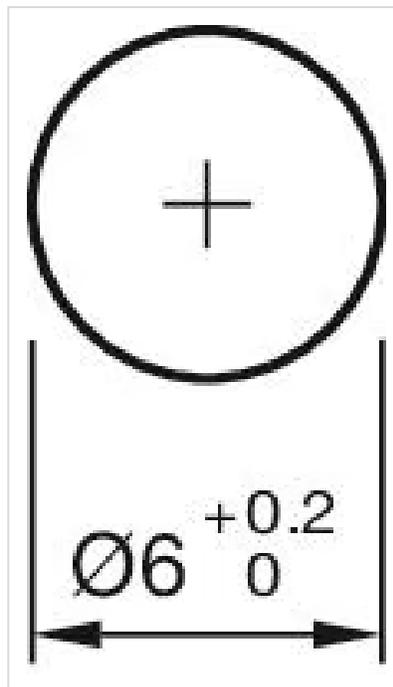

**Wiring diagrams:**

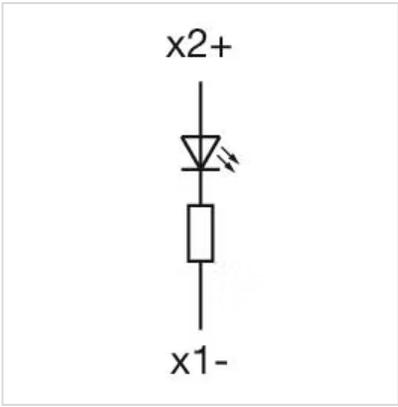

Dimension drawings:

