

Actuator

17-010350

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/17-010350>

Your product:



17-010350 Actuator

FRONT

Front dimension:	Ø 9,5 mm
Reflector:	Metal, polished chromium-plated, flat top LED
Front form:	round

MOUNTING

Design:	raised
Mounting cut-out:	Ø 8 mm

OPERATING-/INDICATION PART

Illumination colour:	Red
----------------------	-----

ELECTRICAL CHARACTERISTICS

Operation current:	20 mA \pm 15 %
Operating voltage:	24 V AC \pm 10 %
Lumi. Intensity:	13 mcd
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector

MECHANICAL CHARACTERISTIC

Weight:	0.005 kg
Tightening torque:	Fixing nut max. 0.2 Nm
Terminal:	Plug-in terminal, 2.8 x 0.8 mm

AMBIENT CONDITION

Operating temperature: – 20 °C ... + 60 °C

Storage temperature: – 25 °C ... + 80 °C

IP Protection: IP40 front side, IP65 front side, according to IEC 60529

CERTIFICATE

Approbations: UL

Conformities: 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)


OTHER

Kind of illumination: Single-LED


Short Description: Actuator, Ø 8 mm, Ø 9,5 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Red

Hints: Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.

Dimension drawings:

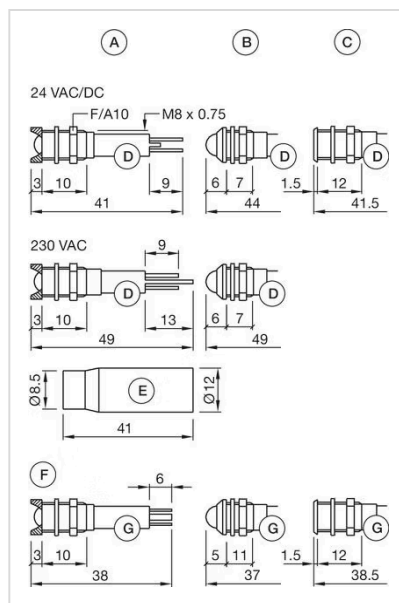

Mounting cut-outs:

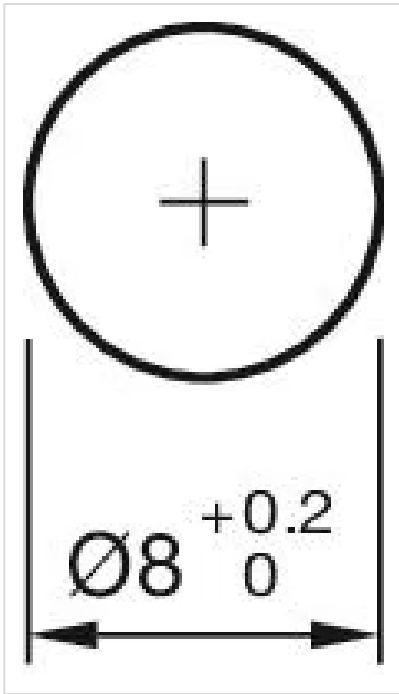

Wiring diagrams:

