

Actuator

17-010351

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-010351>

Your product:



17-010351 Actuator

FRONT

Front dimension:	Ø 9,5 mm
Reflector:	Metal, polished chromium-plated, flat top LED
Front form:	round

MOUNTING

Design:	raised
Mounting cut-out:	Ø 8 mm

OPERATING-/INDICATION PART

Illumination colour:	Green
----------------------	-------

ELECTRICAL CHARACTERISTICS

Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Operation current:	20 mA \pm 15 %
Operating voltage:	24 V AC \pm 10 %
Lumi. Intensity:	8 mcd

MECHANICAL CHARATERISTIC

Terminal:	Plug-in terminal, 2.8 x 0.8 mm
Tightening torque:	Fixing nut max. 0.2 Nm
Weight:	0.005 kg

AMBIENT CONDITION


IP Protection:	IP40 front side, IP65 front side, according to IEC 60529
Storage temperature:	– 25 °C ... + 80 °C
Operating temperature:	– 20 °C ... + 60 °C

CERTIFICATE


Approbations:	UL
Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)

OTHER

Kind of illumination:	Single-LED
Short Description:	Actuator, Ø 8 mm, Ø 9,5 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Green
Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.
Mounting cut-outs:	

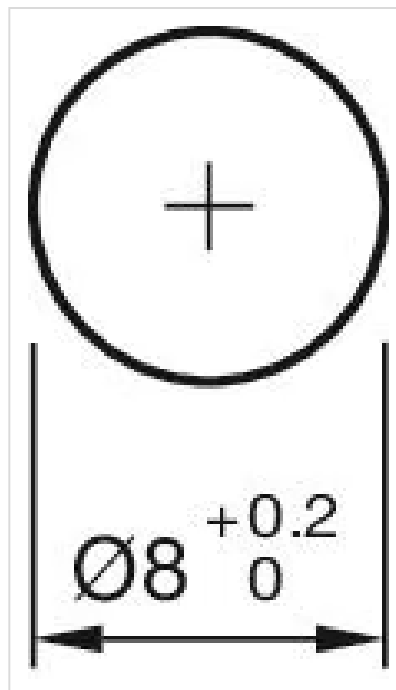

Wiring diagrams:

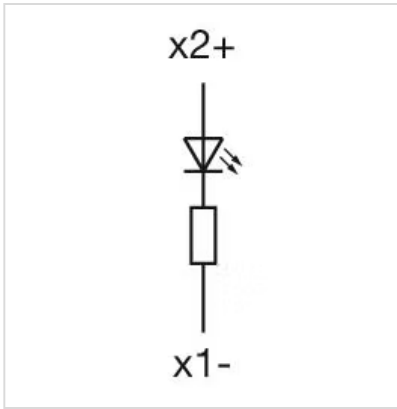

Dimension drawings:

