

Actuator

17-030352

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-030352>

Your product:



17-030352

Actuator

FRONT

Front form:	round
Front dimension:	Ø 7 mm
Reflector:	Metal, polished chromium-plated, internal

MOUNTING

Design:	raised
Mounting cut-out:	Ø 6 mm

OPERATING-/INDICATION PART

Illumination colour:	Yellow
----------------------	--------

ELECTRICAL CHARACTERISTICS

Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Operating voltage:	24 V AC/DC ± 10 %
Operation current:	15 mA ± 15 %
Lumi. Intensity:	6 mcd

MECHANICAL CHARACTERISTIC

Tightening torque:	Fixing nut max. 0.2 Nm
Weight:	0.003 kg
Terminal:	Plug-in terminal, 2 x 0.5 mm

AMBIENT CONDITION


IP Protection:	IP40 front side, IP65 front side, according to IEC 60529
Storage temperature:	– 25 °C ... + 80 °C
Operating temperature:	– 20 °C ... + 60 °C

CERTIFICATE


Approbations:	UL
Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)

OTHER

Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.
Kind of illumination:	Single-LED
Short Description:	Actuator, Ø 6 mm, Ø 7 mm, round, Plug-in terminal, 2 x 0.5 mm, Yellow
Mounting cut-outs:	

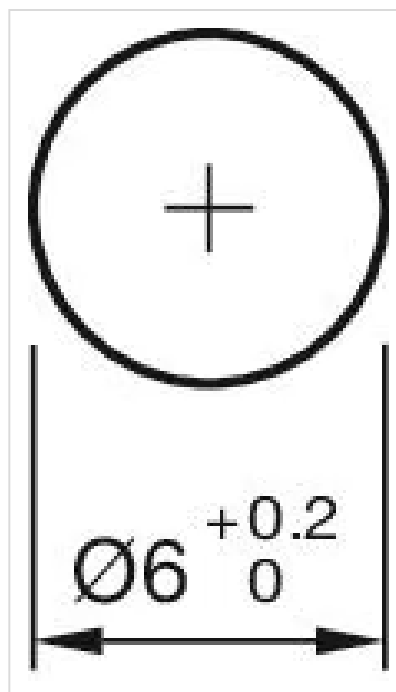

Dimension drawings:

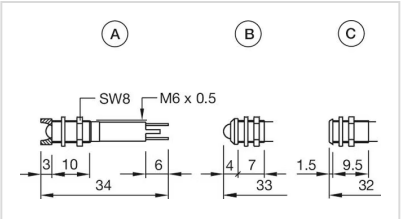

Wiring diagrams:

