

Actuator

17-040360

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-040360>

Your product:



17-040360 Actuator

FRONT

Reflector:	Metal, polished chromium-plated, domed
Front dimension:	Ø 9,5 mm
Front form:	round

MOUNTING

Design:	raised
Mounting cut-out:	Ø 8 mm

OPERATING-/INDICATION PART

Illumination colour:	Red
-----------------------------	-----

ELECTRICAL CHARACTERISTICS

Lumi. Intensity:	76 mcd
Operation current:	19 mA \pm 15 %
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Operating voltage:	24 V AC

MECHANICAL CHARACTERISTIC

Terminal:	Plug-in terminal, 2.8 x 0.8 mm
Tightening torque:	Fixing nut max. 0.2 Nm
Weight:	0.005 kg

AMBIENT CONDITION


Operating temperature:	- 20 °C ... + 60 °C
IP Protection:	IP40 front side, IP65 front side, according to IEC 60529
Storage temperature:	- 25 °C ... + 80 °C

CERTIFICATE


Approbations:	UL
Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)

OTHER

Kind of illumination:	Single-LED
Short Description:	Actuator, Ø 8 mm, Ø 9,5 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Red
Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.
Mounting cut-outs:	

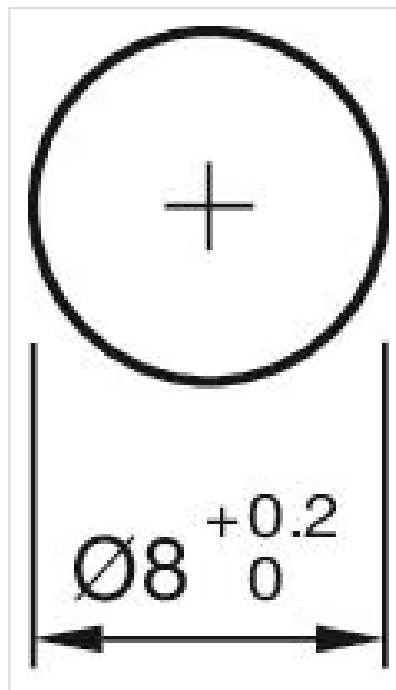

Dimension drawings:

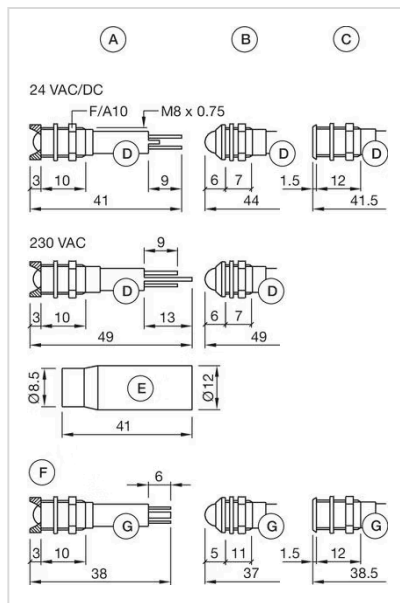

Wiring diagrams:

