

Actuator

17-040361

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-040361>

Your product:



17-040361 Actuator

FRONT

Front dimension:	Ø 9,5 mm
Front form:	round
Reflector:	Metal, polished chromium-plated, domed

MOUNTING

Design:	raised
Mounting cut-out:	Ø 8 mm

OPERATING-/INDICATION PART

Illumination colour:	Green
----------------------	-------

ELECTRICAL CHARACTERISTICS

Operating voltage:	24 V AC
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Operation current:	19 mA ±15 %
Lumi. Intensity:	30 mcd

MECHANICAL CHARACTERISTIC

Tightening torque:	Fixing nut max. 0.2 Nm
Terminal:	Plug-in terminal, 2.8 x 0.8 mm
Weight:	0.005 kg


AMBIENT CONDITION

Storage temperature:	– 25 °C ... + 80 °C
IP Protection:	IP40 front side, IP65 front side, according to IEC 60529
Operating temperature:	– 20 °C ... + 60 °C


CERTIFICATE

Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)
Approbations:	UL

OTHER

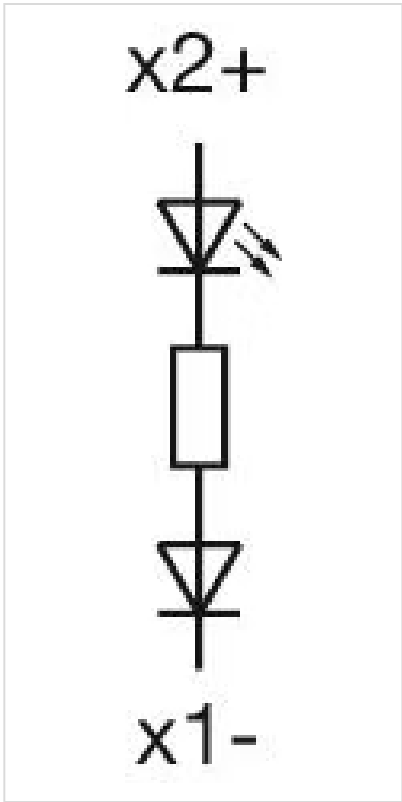Short Description:	Actuator, Ø 8 mm, Ø 9,5 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Green
Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.
Kind of illumination:	Single-LED
Wiring diagrams:	

Dimension drawings:

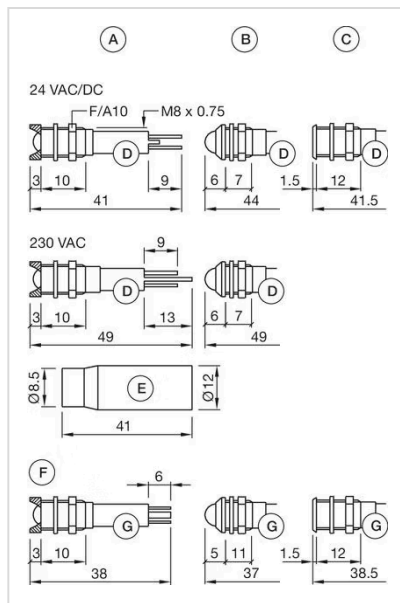

Mounting cut-outs:

