

Actuator

17-041352

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-041352>

Your product:



17-041352 Actuator

FRONT

Front dimension:	Ø 9,5 mm
Front form:	round
Reflector:	Metal, black chromium-plated, domed

MOUNTING

Design:	raised
Mounting cut-out:	Ø 8 mm

OPERATING-/INDICATION PART

Illumination colour:	Yellow
----------------------	--------

ELECTRICAL CHARACTERISTICS

Lumi. Intensity:	32 mcd
Operating voltage:	24 V AC ± 10 %
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Operation current:	20 mA ± 15 %

MECHANICAL CHARACTERISTIC

Weight:	0.005 kg
Tightening torque:	Fixing nut max. 0.2 Nm
Terminal:	Plug-in terminal, 2.8 x 0.8 mm

AMBIENT CONDITION

Storage temperature: – 25 °C ... + 80 °C

Operating temperature: – 20 °C ... + 60 °C

IP Protection: IP40 front side, IP65 front side, according to IEC 60529

CERTIFICATE

Approbations: UL

Conformities: 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)


OTHER

Short Description: Actuator, Ø 8 mm, Ø 9,5 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Yellow


Kind of illumination: Single-LED

Hints: Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.

Wiring diagrams:

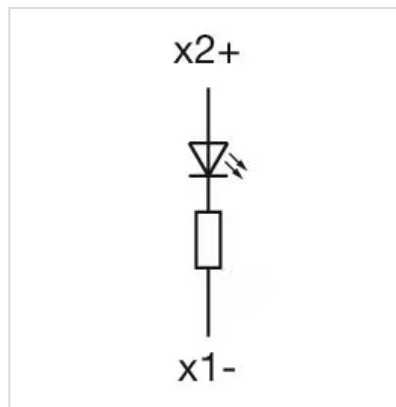

Dimension drawings:

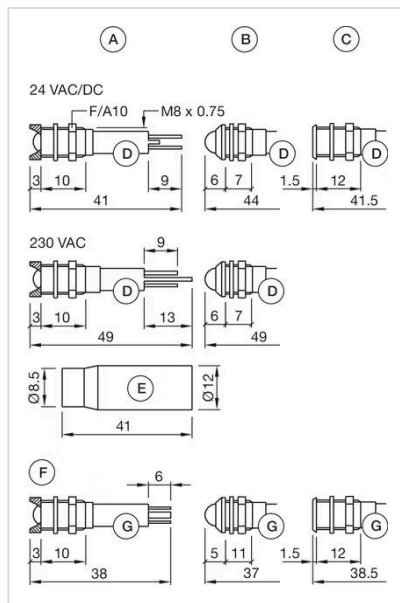

Mounting cut-outs:

