

Actuator

17-050352

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-050352>

Your product:



17-050352 Actuator

FRONT

Reflector:	Metal, polished chromium-plated, internal
Front form:	round
Front dimension:	Ø 9,5 mm

MOUNTING

Design:	raised
Mounting cut-out:	Ø 8 mm

OPERATING-/INDICATION PART

Illumination colour:	Yellow
-----------------------------	--------

ELECTRICAL CHARACTERISTICS

Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Lumi. Intensity:	32 mcd
Operation current:	20 mA ±15 %
Operating voltage:	24 V DC ±10 %

MECHANICAL CHARATERISTIC

Tightening torque:	Fixing nut max. 0.2 Nm
Terminal:	Plug-in terminal, 2.8 x 0.8 mm
Weight:	0.005 kg

AMBIENT CONDITION

IP Protection: IP40 front side, IP65 front side, according to IEC 60529

Storage temperature: – 25 °C ... + 80 °C

Operating temperature: – 20 °C ... + 60 °C

CERTIFICATE

Approbations: UL

Conformities: 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)


OTHER

Kind of illumination: Single-LED


Hints: Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.

Short Description: Actuator, Ø 8 mm, Ø 9,5 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Yellow

Dimension drawings:

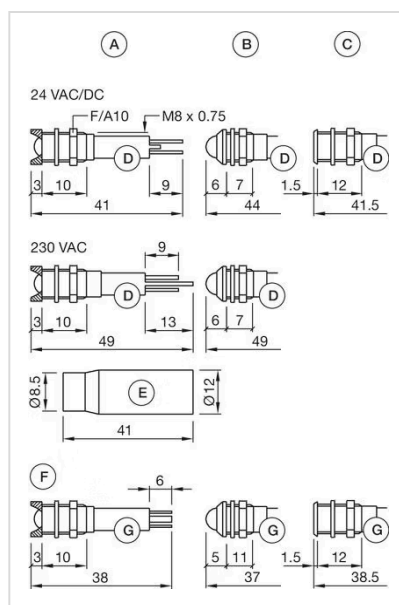

Mounting cut-outs:

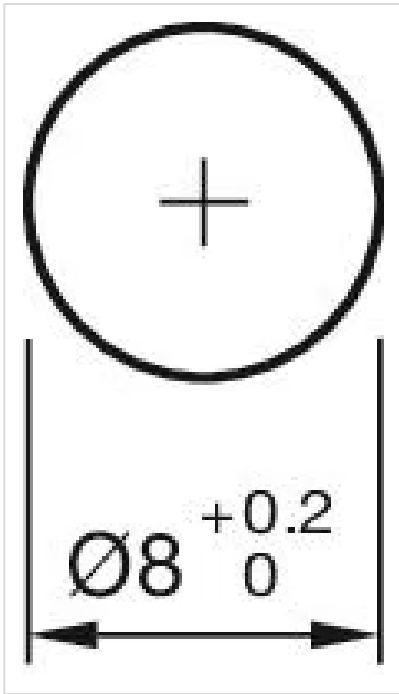

Wiring diagrams:

