

Actuator

17-050360

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-050360>

Your product:



17-050360 Actuator

FRONT

Front form:	round
Reflector:	Metal, polished chromium-plated, internal
Front dimension:	Ø 9,5 mm

MOUNTING

Design:	raised
Mounting cut-out:	Ø 8 mm

OPERATING-/INDICATION PART

Illumination colour:	Red
----------------------	-----

ELECTRICAL CHARACTERISTICS

Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Lumi. Intensity:	76 mcd
Operating voltage:	24 V AC ± 10 %
Operation current:	19 mA ± 15 %

MECHANICAL CHARACTERISTIC

Weight:	0.005 kg
Tightening torque:	Fixing nut max. 0.2 Nm
Terminal:	Plug-in terminal, 2.8 x 0.8 mm

AMBIENT CONDITION


Operating temperature:	– 20 °C ... + 60 °C
IP Protection:	IP40 front side, IP65 front side, according to IEC 60529
Storage temperature:	– 25 °C ... + 80 °C

CERTIFICATE


Approbations:	UL
Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)

OTHER

Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.
Short Description:	Actuator, Ø 8 mm, Ø 9,5 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Red
Kind of illumination:	Single-LED
Mounting cut-outs:	

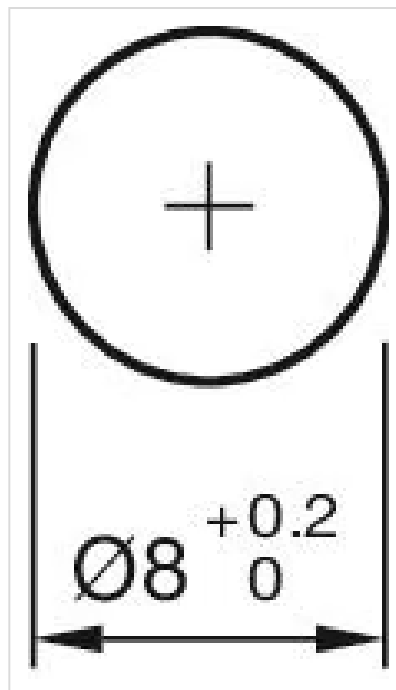

Dimension drawings:

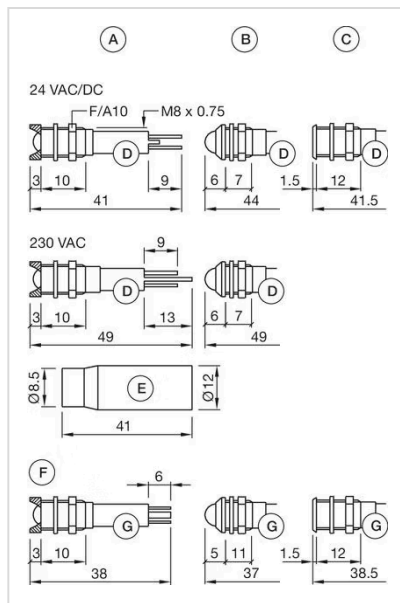

Wiring diagrams:

