

Actuator

17-051352

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-051352>

Your product:



17-051352 Actuator

FRONT

Reflector:	Metal, black chromium-plated, internal
Front dimension:	Ø 9,5 mm
Front form:	round

MOUNTING

Design:	raised
Mounting cut-out:	Ø 8 mm

OPERATING-/INDICATION PART

Illumination colour:	Yellow
-----------------------------	--------

ELECTRICAL CHARACTERISTICS

Operating voltage:	24 V AC/DC ± 10 %
Lumi. Intensity:	32 mcd
Operation current:	20 mA ± 15 %
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector

MECHANICAL CHARACTERISTIC

Tightening torque:	Fixing nut max. 0.2 Nm
Weight:	0.005 kg
Terminal:	Plug-in terminal, 2.8 x 0.8 mm

AMBIENT CONDITION

Operating temperature:	– 20 °C ... + 60 °C
IP Protection:	IP40 front side, IP65 front side, according to IEC 60529
Storage temperature:	– 25 °C ... + 80 °C

CERTIFICATE

Approbations:	UL
Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)


OTHER

Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.
---------------	--


Kind of illumination:	Single-LED
------------------------------	------------

Short Description:	Actuator, Ø 8 mm, Ø 9,5 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Yellow
---------------------------	---

Mounting cut-outs:

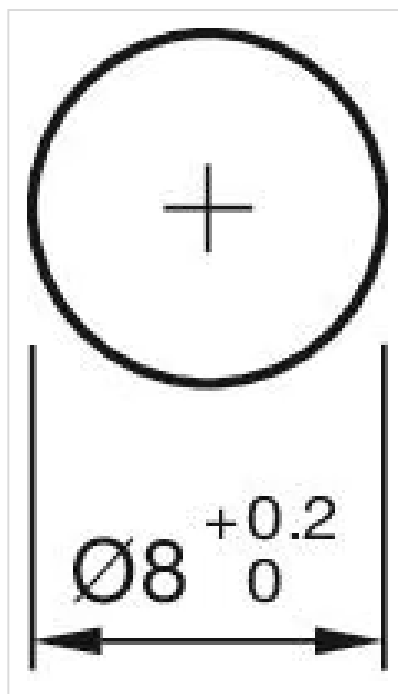

Dimension drawings:

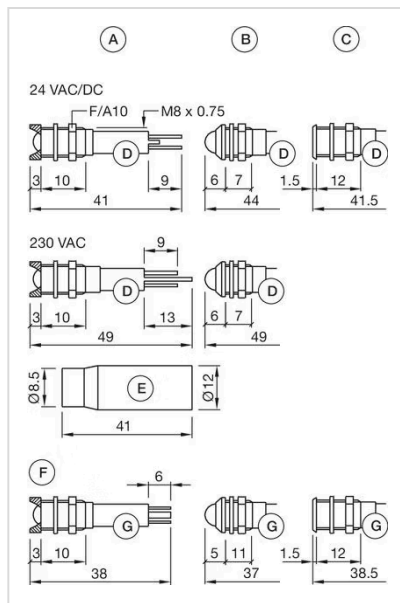

Wiring diagrams:

