

Actuator

52-
132.0252

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/52-132.0252>

Your product:



52-132.0252

Actuator

OPERATING-/INDICATION PART

Lever shape: short

ELECTRICAL CHARACTERISTICS

Standards: According to EN/IEC 61058-1

Electrical lifetime: 50 000 cycles of operation

Contacts: 2 NC / 2 NO

Rated Operational Voltage U_e : 250 VAC/DC according to EN IEC 60947-1

Protection class: II

Thermal current I_{th} : 5 A, according to EN / IEC 60947-5-1
The maximum current in continuous operation and at ambient temperature not exceeding the quoted maximum values.

Switching voltage and switching current:

- 250 VAC, 5 A (ohmic)
- 250 VAC, 2 A (inductive, $\cos(\phi) = 0.7$)
- 125 VAC, 3 A (inductive, $\cos(\phi) = 0.7$)
- 220 VDC, 0.1 A (inductive, L:R = 30 ms)
- 110 VDC, 0.2 A (inductive, L:R = 30 ms)
- 60 VDC, 0.7 A (inductive, L:R = 30 ms)
- 24 VDC, 2 A (inductive, L:R = 30 ms)

Electric strength: 2500 VAC, 50 Hz, 1 min. between all terminals and earth, according to IEC 61058-1, part 15

MECHANICAL CHARACTERISTIC

Switching positions: 2 positions

Mechanical lifetime: 2 Mio. cycles of operation

Contact material: Gold

Terminal: Soldering terminal

Tightening torque: Fixing nut max. 0.5 Nm

Switching system:	Self-cleaning, double-break snap action switching system, 1 normally closed and 1 normally open contact per element.
Wire cross section:	Snap-action switching element with tinned soldering terminals at the sides Max. wire diameter 2 wires à 1.2 mm Max. wire cross-section of stranded cable 1 x 1 mm ²
Switching action:	Rest - Momentary
Weight:	0.006 kg
Switching angle:	42° right
Switching system:	Snap-action switching element

AMBIENT CONDITION


Vibration resistance:	10 g at 10 Hz...1500 Hz, amplitude 0.75 mm (Sinusoidal), according to DIN EN 60512-4-4, DIN EN 60068-2-6
Operating temperature:	– 25 °C ... + 55 °C
Climate resistance:	Standard condition, as per DIN EN 60068-2-30 Changing condition, as per DIN EN 60068-2-14
IP front protection:	IP65, according to DIN EN 60529
Storage temperature:	– 40 °C ... + 85 °C

CERTIFICATE


Conformities:	CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 30 / EU (EMC), 2014 / 35 / EU (LVD)
Approbations:	CB (IEC 61058-1), CQC, CSA, DNV, ENEC (EN 61058-1), UL

OTHER

Hints:	Illuminative
Short Description:	Actuator, optional illuminative, short, 2 NC / 2 NO, Rest - Momentary, Soldering terminal, IP65, according to DIN EN 60529
Housing colour:	Black
Mounting cut-outs:	

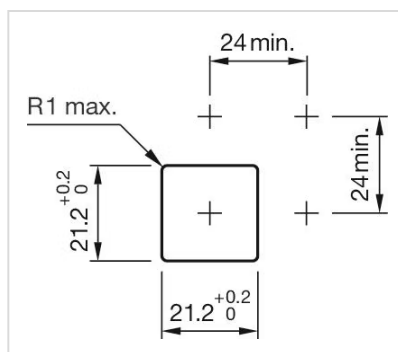

Dimension drawings:

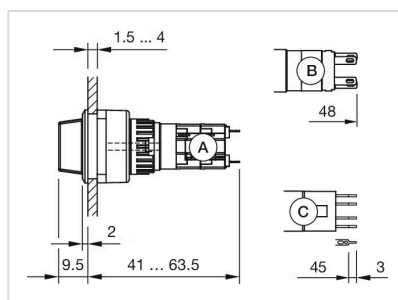

Wiring diagrams:

