


Actuator

704.040.6

Distribution by
DigiKey

DigiKey

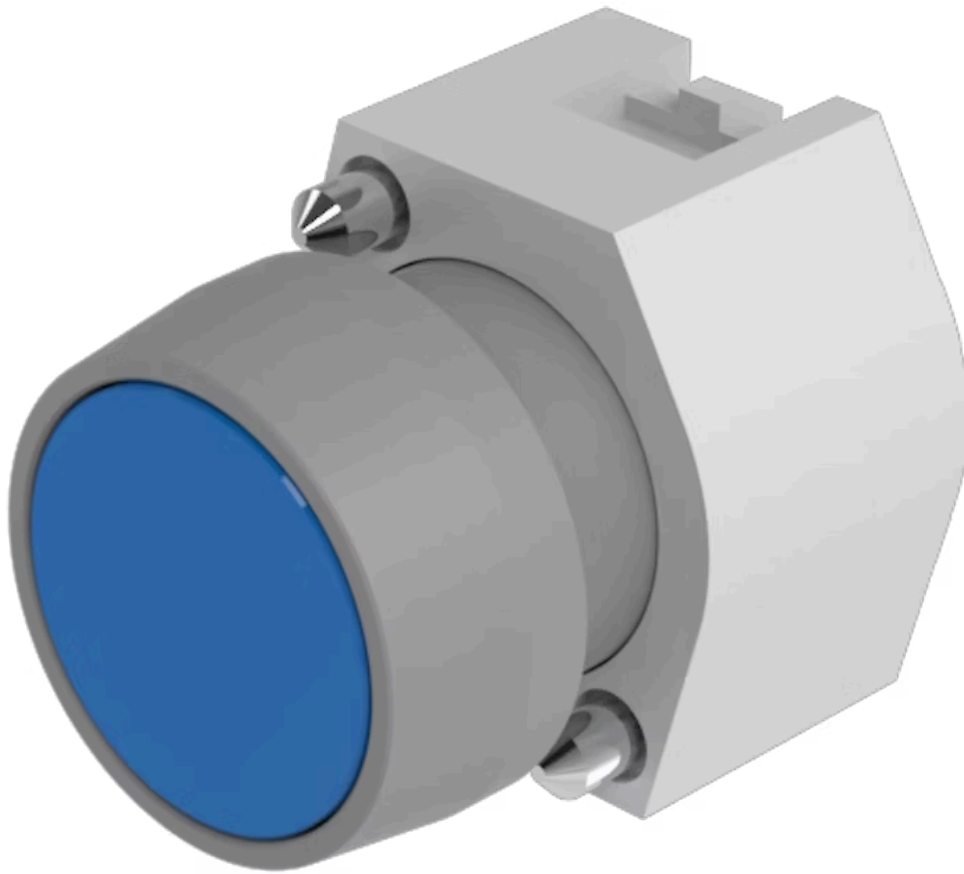

<https://digikey.eao.com/p/704.040.6>

Your product:



704.040.6 Actuator

FRONT

Front dimension:	Ø 29 mm
Front bezel material:	Plastic
Front bezel colour:	Grey
Front form:	round

MOUNTING

Design:	raised
----------------	--------

OPERATING-/INDICATION PART

Lens material:	Plastic
Lens illumination:	non illuminative
Lens colour:	Blue
Lens optics:	transparent
Lens shape:	flush

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
-------------------	---

MECHANICAL CHARACTERISTIC

Switching action:	Maintained
Mechanical lifetime:	≤3 Mio. cycles of operation
Weight:	0.04 kg

Operating force: 8 N

Operating Travel: ca. 5.8 mm ± 0.2 mm

AMBIENT CONDITION

Storage temperature: - 40 °C ... + 85 °C

Operating temperature: - 40 °C ... + 55 °C

IP Protection: IP65 front side

OTHER

Housing colour: Grey


max. number of switching elements: 3

Housing material: Plastic

Short Description: Actuator, Ø 29 mm, flush, non illuminative, Blue, Plastic, transparent, round, Grey, Plastic, Maintained


Hints: Frontring with protective cover to be mounted with a torque of 0.4 Nm onto actuator,Max. 3 switching elements can be clipped on

Mounting cut-outs:

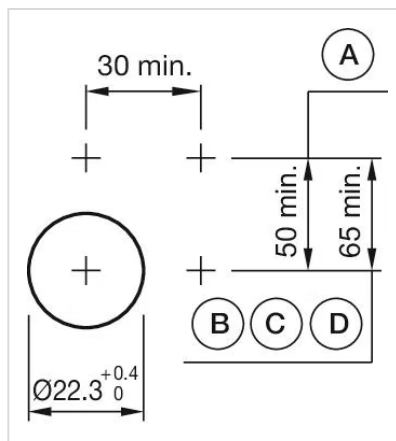

A = Screw terminal
 B = Push-in terminal (PIT)
 C = Plug-in terminal 6.3 mm x 0.8 mm
 D = Double plug-in terminal 6.

Wiring diagrams:

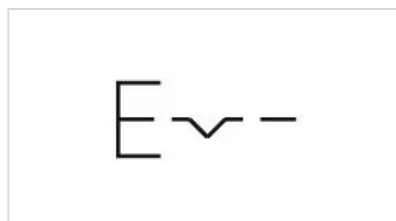

Dimension drawings:

A = Screw terminal

